

### Features

- Innovative roller design simplifies installation and provides out-of-plumb adjustability while glass is installed.
- Cushioned center guide provides smooth, quiet sliding action.
- Gently curved towel bars and knob combination offers storage without encroaching on the bathing space.
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)

### Material

- Frameless, 5/16" (8mm) thick Crystal Clear tempered glass.

### Installation

- Sliding bath door.
- Not for use in hospitality.
- For residential use only.

### Included Components

Additional Components:  
Hardware kit



### Codes/Standards

ANSI Z97.1  
CPSC 16CFR 1201

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.



### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color                                                                               | Code | Description            |
|-------------------------------------------------------------------------------------|------|------------------------|
|  | SHP  | Bright Polished Silver |
|  | NX   | Brushed Nickel         |
|  | ABZ  | Anodized Dark Bronze   |
|  | BL   | Matte Black            |

### Available Glass Options

| Code | Description   |
|------|---------------|
| L    | Crystal Clear |

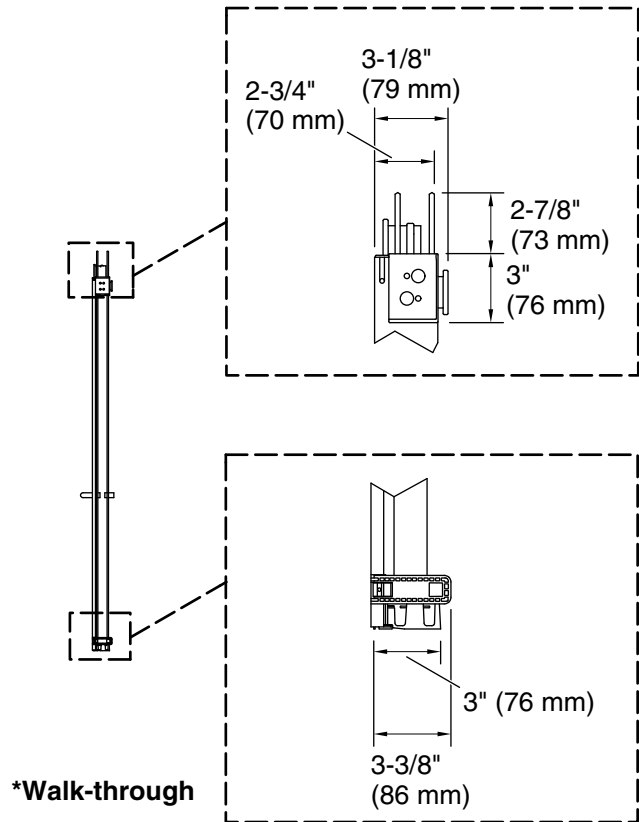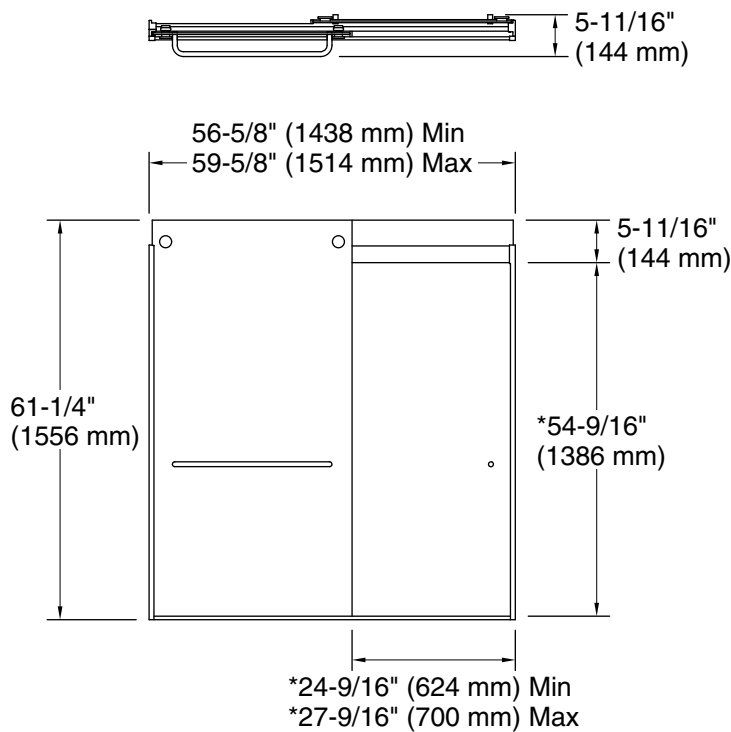

## Technical Information

All product dimensions are nominal.

|                            |                       |
|----------------------------|-----------------------|
| Installation type:         | For bath installation |
| Opening style:             | Sliding/Bypass        |
| Opening Width - Min:       | 56-5/8" (1438 mm)     |
| Opening Width - Max:       | 59-5/8" (1514 mm)     |
| Walk-through - Min:        | 24-9/16" (624 mm)     |
| Walk-through - Max:        | 27-9/16" (700 mm)     |
| Base-To-Wall Radius - Max: | 1/2" (13 mm)          |
| Glass thickness:           | 5/16" (8 mm)          |
| Glass coating:             | CleanCoat®            |

## Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 64-1/2" (1638 mm) to allow for installation clearance.