

### Features

- Vertical handle complements the contemporary style.
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)

### Material

- Frameless, 5/16" (8mm) thick Crystal Clear tempered glass.

### Technology

- Self-closing mechanism offers superior performance and security against water leakage.
- Ultra-low threshold creates easy entry and exit to the showering space.
- Maximum width adjustability.

### Installation

- Out-of-plumb adjustability simplifies installation.
- Door can be installed to open to the left or right to suit your bathroom layout.
- Pivot shower door.
- Not for use in hospitality.
- For residential use only.

### Included Components

Additional Components:  
Hardware kit



### Codes/Standards




ANSI Z97.1  
CPSC 16CFR 1201

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.



### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color   | Code | Description             |
|---|------|-------------------------|
|  | SHP  | Bright Polished Silver  |
|  | ABZ  | Anodized Dark Bronze    |
|  | BNK  | Anodized Brushed Nickel |

### Available Glass Options

| Code | Description   |
|------|---------------|
| L    | Crystal Clear |

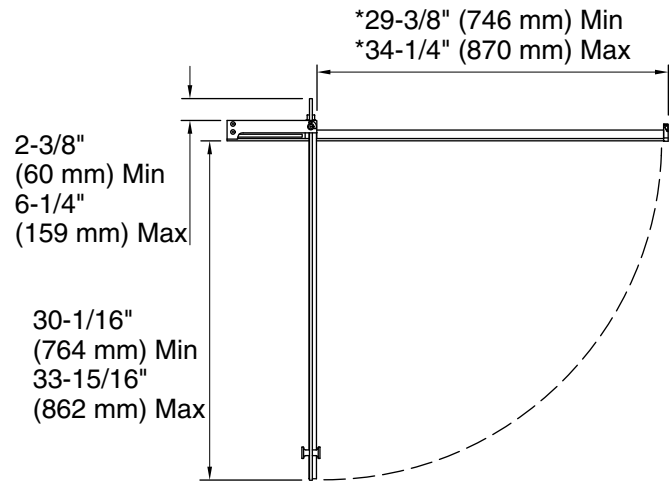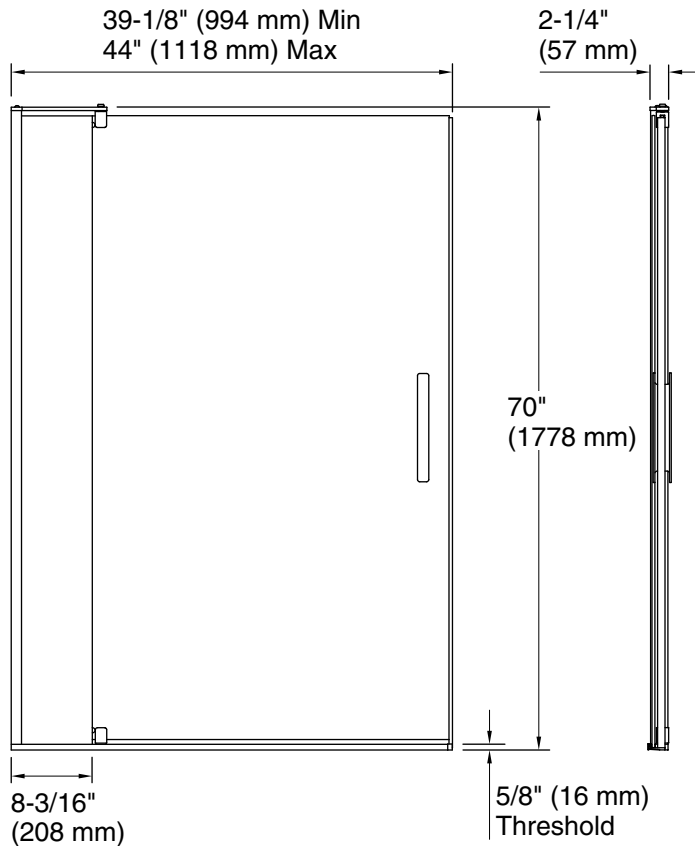

\*Walk-through

### Technical Information

All product dimensions are nominal.

|                            |                              |
|----------------------------|------------------------------|
| Installation type:         | For shower base installation |
| Opening style:             | Pivot                        |
| Opening Width - Min:       | 39-1/8" (994 mm)             |
| Opening Width - Max:       | 44" (1118 mm)                |
| Walk-through - Min:        | 29-3/8" (746 mm)             |
| Walk-through - Max:        | 34-1/4" (870 mm)             |
| Base-To-Wall Radius - Max: | 3/8" (10 mm)                 |
| Glass thickness:           | 5/16" (8 mm)                 |
| Glass coating:             | CleanCoat®                   |

### Notes

Install this product according to the installation guide.

Strike jamb is made of clear plastic and may not cover existing shower door holes.

NOTICE: The vertical opening should be a minimum of 74" (1880 mm) to allow clearance for installation.